


LEM Series Red Laser Line Module

Part No: LEM-1018-50xx-SLx

Mechanical Drawing

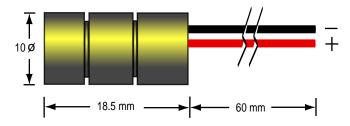

Product Features

High Stability and low noise Collimated or Adjustable focus beam Reverse Polarity Protection Custom Options Available

Application

Measurement
Optical Instrument
Automation
Alignment
Line Mark

OPTICAL		
Wavelength	650 nm	
Optical Output Power ¹	<10mW or < 5 mW or <1mW	
Stability	<1%	
Wavelength Drift	0.2nm/°C	
Noise (20MHz Bandwidth)	<0.5% RMS	
Laser Operation	Continuous	
Laser Structure	Single Mode Laser	
Focus Lens	PMMA plastic lens	
Line Angle	5°/20°/30°/60°/90°	
ELECTRICAL		
Operating Voltage ²	3 or 4.5 VDC	
Operating Current	<40 mA	
Control Circuit	Auto Power Control	
Electrical Connections	+Red, -Black	
MECHANICAL		
Dimension	See chart	
Cable ³	60mm	
Operating Temperature	-10°C to +50°C	
Storage Temperature	-40°C to +80°C	

Notes

Specification

- Please advise output power in advance, we can release Class II (under 1mW) or Class IIIa (under 5mW) or Class III (under 10mW) for different market.
- 2. Input power can be fixed in 3 to 5 certain DC voltage.
- 3. Standard cable length is 60mm, there are 100/150/200mm or with connector for your special need.

Caution:The cooper is internally connected to the circuit + pole, wrong connection may damage the laser module.

Model Number Definition:

diameter	total length	wavelength	output	lens	beam	angle
65:6.5mm	20:20mm	50:650nm	01:0.8mW	G:glass	P:point	
80:8.0mm	23:23mm	35:635nm	05:5mW	S:plastic	L:line	1:5°
10:10mm	27:27mm		10:10mW			2:20°
11:11mm	32:32mm		20:20mW			3:30°
12:11.5mm	35:35mm					6:60°
						9:90°

Operational Hazard-Semiconductor Laser Diode Module: This laser module emits radiation that is visible and harmful to human eye. When in use, do not look directly into the laser emitting aperture. Direct viewing of laser diode emission at close range may cause eye damage. Limited Warranty: One year. No warranty coverage for disassembly, modifications or damage due to abuse or misapplication.